ETERNO SDM

LED RECESSED DOWNLIGHT

LED Recessed Downlight-DLT15 SMD Series Specifications

Photos View:



© Copyright FABAE Lighting |
www.fabaelighting.com


Dimensions:




© Copyright FABAE Lighting |
www.fabaelighting.com

Product Features:

- **IP40 Rating Design: S**uitable for indoor application only.
- **Long Lifespan:** Integrated die-cast aluminum heat sink ensures lifespan of 50,000 hours or more.
- **Glare-free Design :** with Milky PC Diffuser ,the UGR<19 provides eye-friendly lighting for bedrooms and offices.
- **Flexible Dimming Options:** Supports Non-Dim, TRIAC, 0-10V, Tuya zigbee and DALI dimming with smart control via APP.
- **Wide Color Temperature Range:** Available in 2700K to 6000K, with tunable CCT 2700-6000K options for customized lighting scenes.
- **High Luminous Efficiency:** Delivers 100 lumens per watt with high CRI options (Ra80+/Ra90+) for accurate color rendering.
- **Multiple Housing Colors:** Available in White, Black as options.

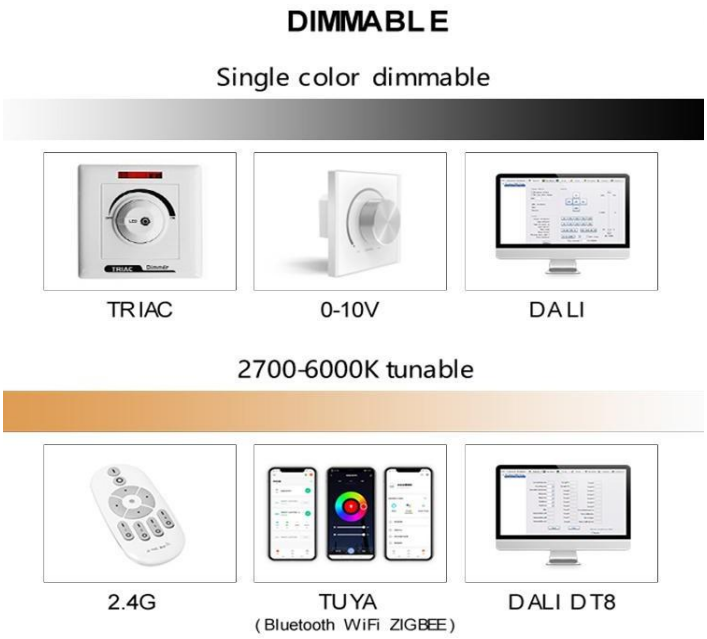

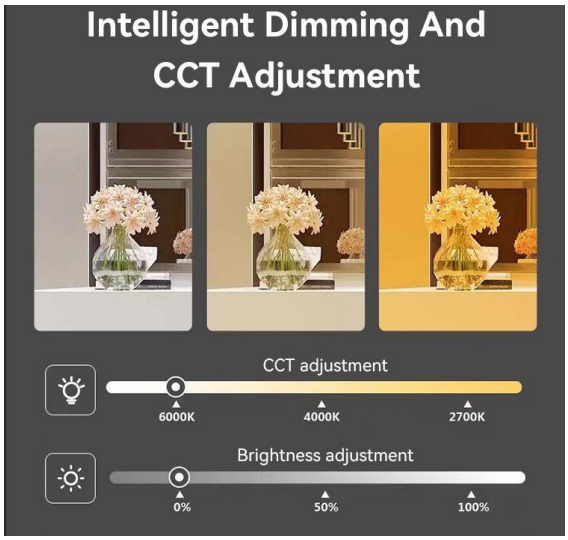

© Copyright FABAE Lighting |
www.fabaelighting.com

Parameters:

Model	MF-DLT15-5W/7W/10W/12W/15W/20W/25W/30W/35W/40W/45W/50W
Input voltage	110Vac or 200-240Vac, 50hz/60hz
Power(watt)	5W/7W/10W/12W/15W/20W/25W/30W/35W/40W/45W/50W
Color temperature	2700K/3000K /3500K/ 4000K / 5000K /6000K
LED Chip	OSRAM/Epistar SMD as options
LED Driver	Lifud/Aohuaweiye/Eaglerise/BOKE Brand for different dim version
PF	5-20W≥0.50, 20W≥0.95
Housing Colour	White/black as options
Cover	PC Milky
Luminous Flux (lm)	100LM/W
CRI（Ra）	Ra90+/ Ra80+ As options
Lifespan	≥50000hrs
Beam Angle	120°
Material	Die-casting Aluminum
Operating Temperature	-20°C ~50°C
Dimmable	Non-Dim/Triac/0-10V/Dali-2 dimmable/Tuya Zigbee as options
CCT Adjustable	2700-6000K Tunable as optional if need
IP	IP40
UGR	<19
Certificate	CE/ RoHS（Whole Lamp）; CE/ROHS/CB/SAA(Driver)
Life Spain	⩾ 50,000Hrs

© Copyright FABAE Lighting |
www.fabaelighting.com