SAGA MF

LED 60X60 PANEL LIGHT



AVAILABLE SIZE


- 600x600mm
- 300x1200mm
- 600x1200mm
- 620x620mm


FEATURES

- Seamless flat frame. Double sides Robot welding technology, no light leaks at the corners
- Ultra thin. 39" Aluminum frame fits standard dropped ceilings.
- High brightness SMD chip with 50,000hrs. lifespan.
- UGR<19 available.
- DALI, Triac, Push, DALI+Push, Remote Control are for options.
- Tool-free mounting options.
- Standard dropped ceiling.
- Drywall hanging kit for drywall.
- Surface mounting kit.
- Input voltage is 220-240VAC






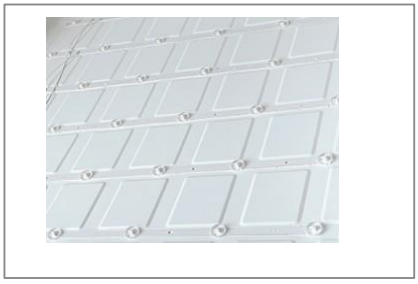

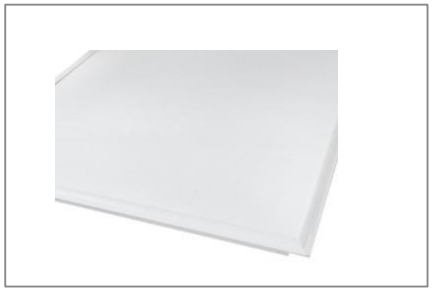


© Copyright FABAE Lighting |
www.fabaelighting.com


DIMENSION




600*600mm



620*620mm

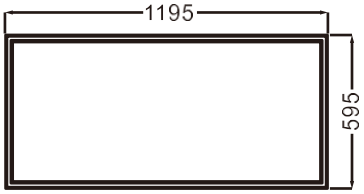

600*1200mm

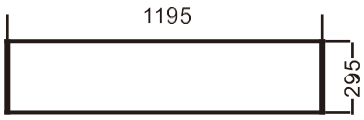

300*1200mm

PARAMETER

Size	Model	Nominal power	Lumen	Efficiency
595x595mm	MF-PL-6060-30W	30W	2400LM	120 LM/W
595x595mm	MF-PL-6060-36W	36W	2900LM	120 LM/W
595x595mm	MF-PL-6060-40W	40W	3200LM	120 LM/W
620x620mm	MF-PL-6262-30W	30W	2400LM	120 LM/W
620x620mm	MF-PL-6262-36W	36W	2900LM	120 LM/W
620x620mm	MF-PL-6262-40W	40W	3200LM	120 LM/W
295x1195mm	MF-PL-3012-30W	30W	2400LM	120 LM/W
295x1195mm	MF-PL-3012-36W	36W	2900LM	120 LM/W
295x1195mm	MF-PL-3012-40W	40W	3200LM	120 LM/W
595x1195mm	MF-PL-6012-60W	60W	4900LM	120 LM/W
595x1195mm	MF-PL-6012-72W	72W	5760LM	120 LM/W

Optical parameters	Light Source	SMD5050
	CCT	3000K/ 5000K/ 6000K
	CRI	>80RA
	Beam Angleθ/2	120°
	SDCM	<9
	Lifespan	=50,000Hrs
Electrical parameters	Power Input/frequency	AC220-240V, 50/60Hz
	Dimmable	No
	Power Factor (PF)	>0.6
	Start Time	=0.5 S
Mechanical parameters	Material	AL frame + PS Diffuser
	IP Rating	IP44
Others	Working Temperature & Humidity	-25? ~50? ,10%~90% R.H.
	Storage temperature & Humidity	-40? ~85? ,40%~80% R.H.
	Certificate	GS TUV CE RoHS CB SAA

© Copyright FABAE Lighting |
www.fabaelighting.com