ETERNO MF03

LED RECESSED SPOT DOWNLIGHT

Anti-glare LED Recessed Spot Downlight

Photos View

Specifications



White Ring
White Reflector



White Ring
Black Reflector



White Ring
Shiny Silver Reflector



White Ring
Rose Gold Reflector









White Ring
Champagne Gold Reflector

© Copyright FABAE Lighting |
www.fabaelighting.com


Dimensions:





© Copyright FABAE Lighting |
www.fabaelighting.com

Product Features:

- **IP20/IP44 Protect Rating:** Anti-humid and dustproof design suitable for wet areas like bathrooms spaces.
- **Long Lifespan:** Integrated die-cast aluminum heat sink ensures lifespan of 50,000 hours or more.
- **Anti-Glare Design:** Deep recessed structure with UGR<19 provides eye-friendly lighting for bedrooms and offices.
- **Flexible Dimming Options:** Supports Non-Dim, TRIAC, 0-10V, and DALI dimming with smart control via APP.
- **Wide Color Temperature Range:** Available in 2700K to 6000K, with tunable CCT options for customized lighting scenes.
- **High Luminous Efficiency:** Delivers 100 lumens per watt with high CRI options (Ra80+/Ra90+) for accurate color rendering.
- **Multiple Housing Colors:** Available in Matte White/Matte Silver/Matte Black/bright Sliver/Gun Black/Rose Gold
- to match various interior styles.

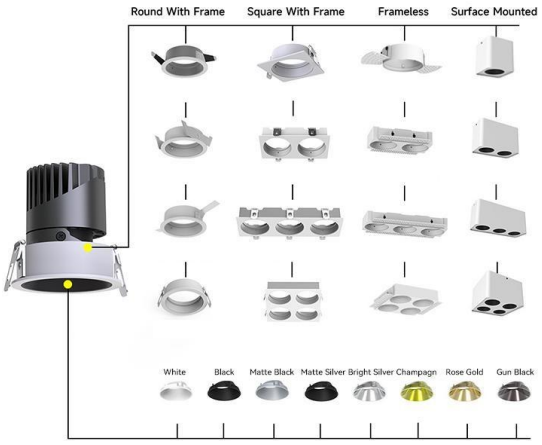

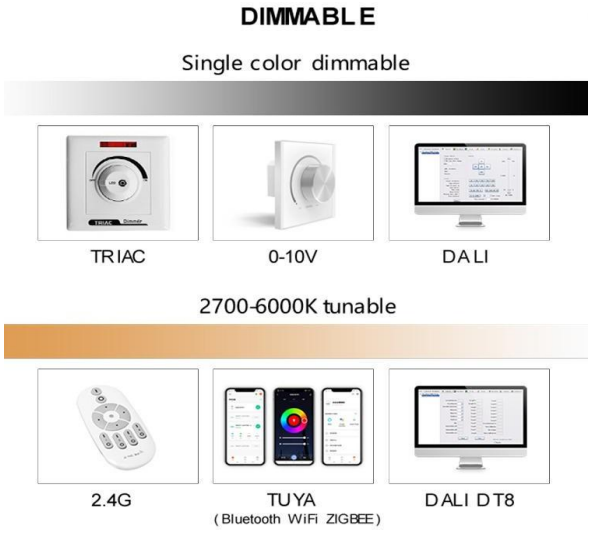

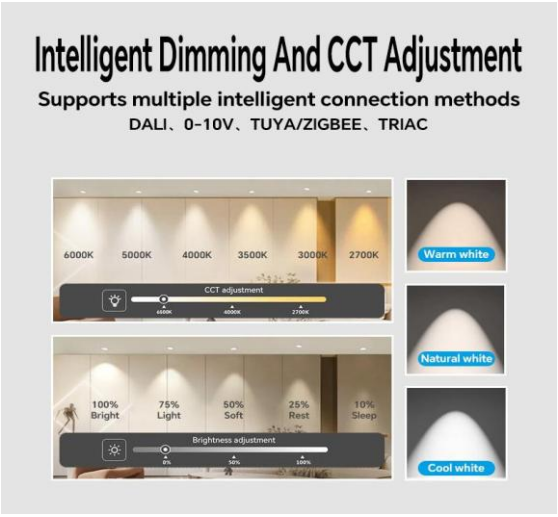



© Copyright FABAE Lighting |
www.fabaelighting.com

Parameters:

Model	MF-HGS10-7W/10W/12W/15W/20W/25W/30W
Input voltage	200-240Vac or 110Vac, 50hz/60hz, DC24V available
Power(watt)	7W/10W/12W/15W/20W/25W/30W
Color temperature	2700K/3000K /3500K/ 4000K / 5000K /6000K, 2700-6500K Tunable
LED Chip	OSRAM/Bridgelux COB
LED Driver	Aohuaweiye/Lifud/BOKE Brand for different dim version
PF	7-15W≥0.50, 20W≥0.95
Housing Colour	White Ring
Reflector color	Matte White/Matte Silver/Matte Black/bright Sliver/Gun Black/Rose Gold
Luminous Flux (lm)	100LM/W
CRI（Ra）	Ra80+/Ra90+
Lifespan	≥50000hrs
Beam Angle	8°/15°/24°/38°/55°
Material	Die-casting Aluminum
Operating Temperature	-20⁰C ~50⁰C
Dimmable	Non-Dim/Triac/0-10V/Dali-2 dimmable as options
CCT Adjustable	2700-6000K Tunable as optional if need
IP	IP20/IP44
UGR	<19
Certificate	CE/ RoHS（Whole Lamp）; CE/ROHS/CB/SAA(Driver)
Life Spain	⩾ 50,000Hrs

© Copyright FABAE Lighting |
www.fabaelighting.com