
EPIQ MF

LED WEATHERPROOF LIGHT

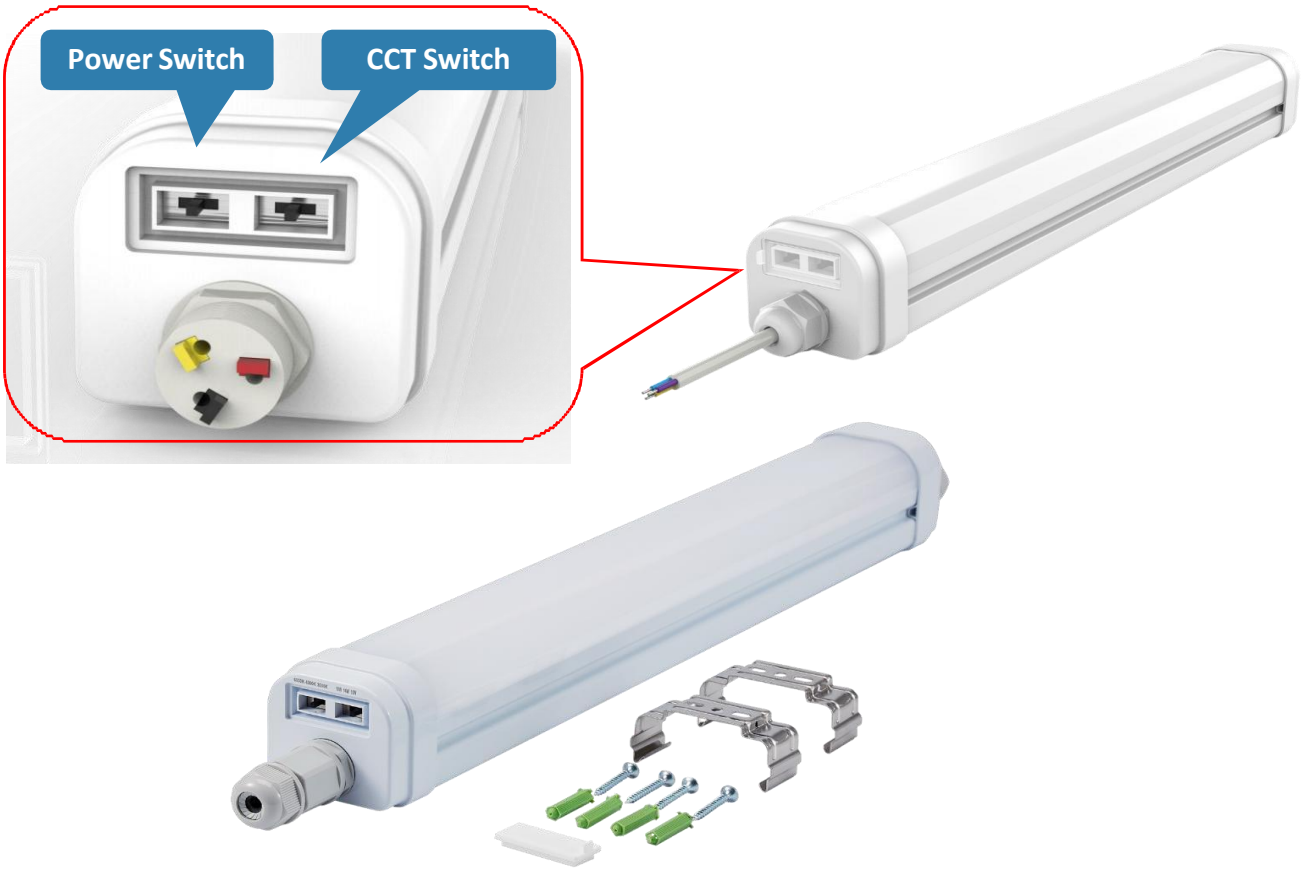

© Copyright FABAE Lighting |
www.fabaelighting.com

Matters needing attention

- Before installing the lighting fixtures, please read this instruction manual carefully.
- The lighting fixtures should be installed, connected and tested by a certified installer based on the local regulations.
- Lamps should always be installed or replaced with care.
- Please check the local voltage in accordance with the product requirements before using the product.
- Relamping only can be done when the power is off and the lamp is completely cooled down.
- When a lamp is to be cleaned, make the power off and let it cool down completely.Clean the fixture with a soft cloth and a standard PH neutral detergent. Stainless steel finishing should be maintained regularly
- Misuse of, or changes to the fixture shall nullify the guarantee.
- Don’ t cover the fixtures with flammable materials.
- Exclusively replaced by the manufacturer or his service agent or the similar qualified person in order to avoid a hazard.



Temperature Characteristics T-ambient 25 C

Temperature

Operating -20~+40 ℃

Storage -40~+85 ℃

Electrical Characteristics

Input Voltage: AC100~277V 50/60Hz

PF:≥0.9 Color Temperature 3000K-6500K（3CCT adjustable)

Power Efficiency:≥0.9

Parameter


Model	Power adjustable (W)	Light Source	LED QTY (pcs)	Lm/W	CRI	Beam Angle
MF-LI06H18W-GC1	10/14/18	2835	240	140 160 175	>80	180
MF-LI12H38W-GC1	20/28/38	2835	432			
MF-LI15H50W-GC1	35/42/50	2835	624			

© Copyright FABAE Lighting |
www.fabaelighting.com

■ Features

1. CCT+3 power switchable , One lamp can instead of 9 items , save a lot of stock funds .
2. Elegant appearance and patent design， Imported fire-proof PC material, safer and more reliable.
3. Imported fire-resistant PC material, safer and more reliable.
4. Barb-type mounting clip, both anti-drop and easy to install.
5. A variety of installation methods: lamps can be linkable or not, ceiling installation, hoisting, wire rope hanging, etc.
6. Pass EMC power supply, meet the certification requirements.
7. IP69K， IK08， IP66 .

■ Product Dimension

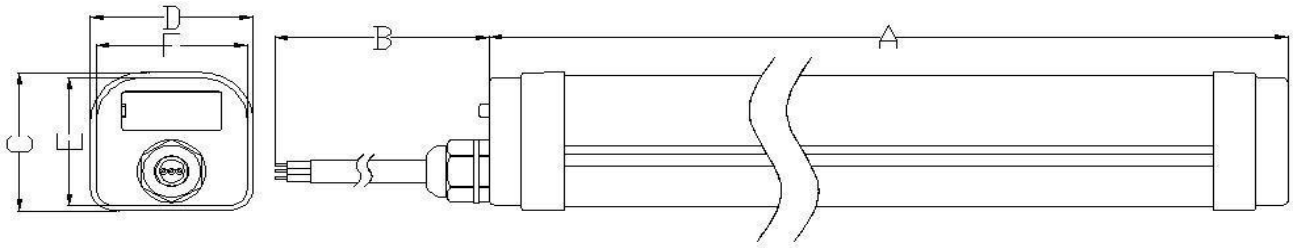

Model	A （mm）	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	Tolerance
MF-LI06H18W-GC1	495	500	61.2	65.2	56.5	60.5	± 3
MF-LI12H38W-GC1	1095						± 3
MF-LI15H50W-GC1	1395						± 3

■ Packaging

Model	Inner box Size(mm)	Carton Size(mm)	Qty/CTN	G.W/CTN
MF-LI06H18W-GC1	600*74*74	620*320*240mm	12piece/Carton	9kg
MF-LI12H38W-GC1	1200*74*74	1220*320*240mm	12piece/Carton	17kg
MF-LI15H50W-GC1	1500*74*74	1620*320*240mm	12piece/Carton	18kg

© Copyright FABAE Lighting | www.fabaelighting.com